



华之杯太阳能

亿光源集团控股有限公司
YiGuangYuan Group Holding CO.,LTD
中山市雷比照明有限公司
ZhongShan LeiBi Lighting CO.,LTD



地址：广东省中山市小榄圩西一广丰村西路15号5幢
ADD: Bld 5, No. 15 West Guangle Rd, Guangfeng Luxiyi,
Xiaolan, Zhongshan, Guangdong, China.
电话/Tel: +86-760-88756008
传真/Fax: +86-760-88756007
网址: www.soo-led.com
http://www.soo-led.com



华之杯太阳能

—— 强光所在 感应未来 ——
BE STRONGER BRIGHT
LEAVE THE FUTURE

亿光源集团控股有限公司
YiGuangYuan Group Holding CO.,LTD

 **4000-6464-55**



华之杯|公司简介 HuaZhiBei | COMPANY PROFILE

华之杯（中国）成立于2009年。是一家以第四代节能环保光源LED照明为方向，致力于大功率LED的封装和研发，户内外照明灯具的生产、销售及配套设计与服务为一体的高新企业。旗下拥有：华之杯照明电器厂、华之杯门市部、雷比照明有限公司、亿光源大功率封装厂。公司总部设于中国广东省中山市小榄。公司专注于高亮照明市场，致力打造21世纪LED高亮节能产品的第一品牌。

公司具备完善的生产配套系统；一流的技术人才；统一的高效物流；完善的售后平台。这些为华之杯进军LED高亮照明领域奠定了良好的基础。同时，以“快乐工作，同享成果”为企业及员工间架起紧密桥梁；以“狼”猎食的精神为企业抢夺市场提出迫切要求；以“才”为最高准则，纳天下之“贤”！

公司以高光，高亮大功率封装延伸同，始终坚持“高亮”照明领域为方向。以适应市场需求为目标，不断开拓创新，竭诚为客户提供优质的LED照明产品。同时全体公司同仁希望与国内外客商在LED革命中携手并进、共创双赢、共同发展、共创绿色照明的新世界。

HUA ZHIBEI (CHINA) LIGHT CO.,LTD was established in 2009 with the orientation of the fourth generation energy-serving environmental protection lighting LED. The company is a high-tech enterprises endeavored in interation of the LED packing and R&D, indoor and outdoor lighting production, sales and design. It includes HUA ZHI BEI lighting factory, LEI BI Lighting Co., Ltd. sales department and YGY high power packing factory. The company headquarter is located in Xiaolan Zhongshan Guangdong China. The company focus on high lumen lighting market aiming at building the No. 1 brand in the LED local and focus lighting energy serving products.

HUA ZHI BEI has the well-equipped production system, technicians and uniformed high efficient logistic platform which is laid solid foundation for the company heading in LED high lumen field. Meanwhile the concept of happy work and sharing the success is the closed between the enterprise and employees. The spirit of wolf grabbing foods is the demand of the enterprise to recruit people. The company is seeking for the elite and professional talents.

Working in the high light and power packing the company is insist on developing in the high lighting field. Adapting the marketing demand and continuous developing and innovation HUA ZHI BEI is try it' s best to provide the quality products to customers. The whole company colleagues invites the progress together to create the win-win situation, common development with customers home and abroad for creating new world of environmental protection lighting.



华之杯公司|企业文化 HuaZhiBei | ENTERPRISE CULTURE

企业目标 ENTERPRISE OBJECTIVE


专注于LED照明领域，建立新一代LED照明产品执行标准，推动产业升级，成为中国乃至全球最优秀的照明产品制造商。
 Specialize in the LED lighting field, establish a new generation of LED lighting product standards, promote the industrial upgrading, to be the most excellent lighting products manufacturer in CHINA even in the world.

企业理念 ENTERPRISE PHILOSOPHY

言必行，行必果 专注于心，精益求精 关注人的价值，关注团队的成长， 关注公司、员工与社会的和谐发展
 True to its word, line must be fruit, focus on the heart, take the best from the best, focus on human values and team' s growth, pay attention to the harmonious development of the company, employees and society.

企业宗旨 ENTERPRISE TENET

客户满意是我们永远的追求。 以人为本，以质量，服务求生存，求发展 塑造精英团队，打造黄金品牌。
 Customer satisfaction is our eternal pursuit, people-oriented, survive on quality, develop with service, built the excellent team, make the famous brand.

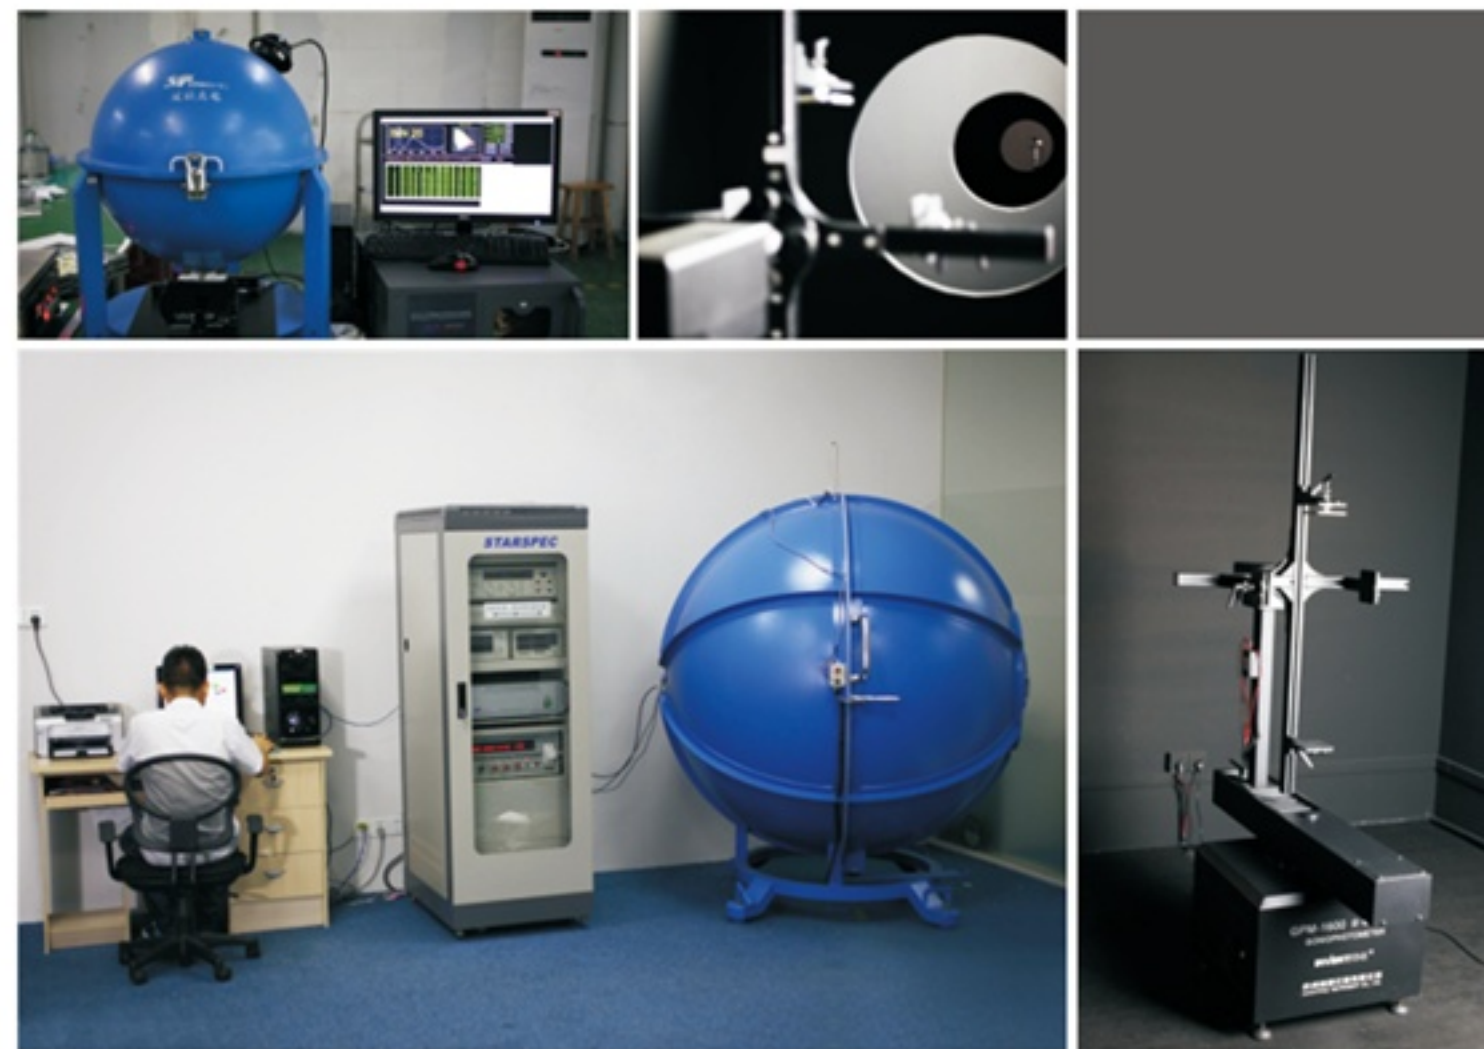

LED LIGHTING

Wisdom Determines To succeed or notwhile talents are the source of widom

决定成败的是智慧 形成智慧的是人才

高效的研发团队是产品力提升的必要保障，各大品类综合完善的推出是这支队伍能力的表现。
 Effective R&D team is the necessary term for improving the product, and integrated perfect detrusion of each category is the performance of the team capabilities.

庞大的产品矩阵，适应不同地域、不同群体的需要。
 Huge of the product categories meet the needs of different regions and groups.

华之杯在欧洲、美洲、亚洲有长期的贸易合作伙伴，在国内拥有一流的营销网络，目前网点覆盖了全国大部分地区，各市、县、乡、镇等均有优秀商家加入，并赢得了主要市场。公司通过了ISO9001质量管理体系，主导产品先后通过了TUV/SGS/CE/ROHS等国际认证。把幸福之光、健康之光、美丽之光带给越来越多的消费者，做一个有责任感的优秀企业，是华之杯的宏伟使命！

Zhongshan hua zhi bei lighting Co.,Ltd has done a long time trading business in Europe, America and Asia. We have the best marketing network in domestic. The network cover the most of the district, town and city of our country, and also attract the outstanding vendors from villages and towns to join us and win the main market. We passed the ISO9001 quality certification system. Our main products have passed the TUV/SGS/CE/ROHS certification. To make more and more consumers feel happy, healthy and beautiful is our responsibility and mission which should show be showed in the outstanding enterprise.



企业认证



产品目录

太阳能路灯系列-----P01-08

Solar street lights series

太阳能投光灯系列-----P9-14

Solar light projector series

地埋灯系列-----P15

Buried lamp series

壁灯系列-----P16

Wall lamp series

常规路灯系列-----P17-19

Conventional street lights series

工矿灯系列-----P20-22


Industrial and mining lamp series

常规投光灯系列-----P23-26

Conventional light projector series




宝剑太阳能感应系列
Sword solar Induction series
TYN-GY-10

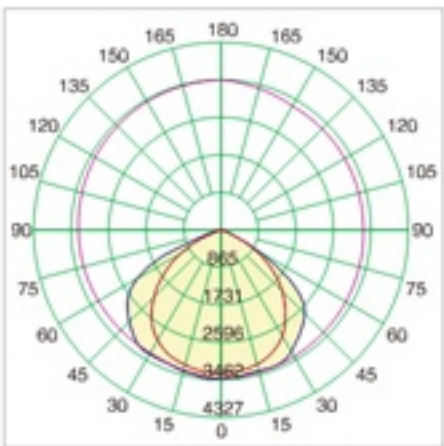

型号 Model No.	TYN-GY-10		
额定功率 Rate Power	20W	30W	50W
适用高度 Height	4~6M	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	11000MAH	16000MAH	21000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	350 × 150 × 70MM	400 × 150 × 70MM	500 × 210 × 70MM
太阳能板功率 Solar panel power	20W	30W	50W
工作时长 Working Time	12Hrs	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65




宝剑太阳能遥控系列
Sword solar energy remote control series
TYN-YK-10

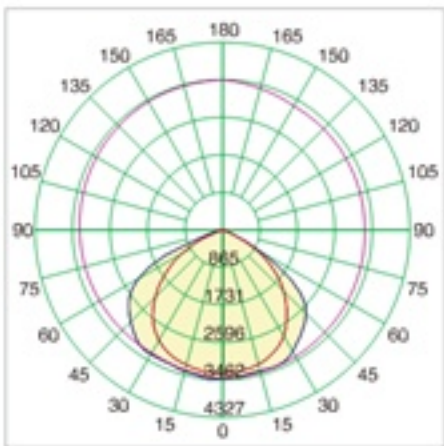

型号 Model No.	TYN-YK-10		
额定功率 Rate Power	20W	30W	50W
适用高度 Height	4~6M	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	11000MAH	16000MAH	21000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	350 × 150 × 70MM	400 × 150 × 70MM	500 × 210 × 70MM
太阳能板功率 Solar panel power	20W	30W	50W
工作时长 Working Time	12Hrs	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65




宝剑太阳能智能化系列
Sword solar energy intelligent series
TYN-10

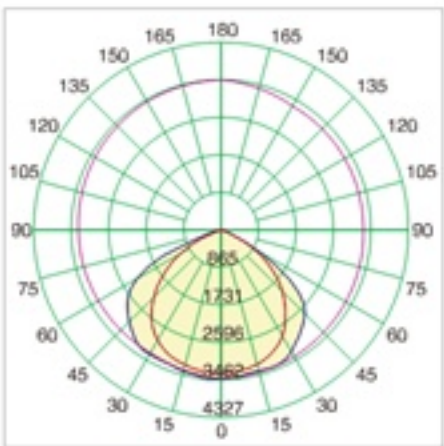

型号 Model No.	TYN-10		
额定功率 Rate Power	20W	30W	50W
适用高度 Height	4~6M	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	11000MAH	16000MAH	21000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	350 × 150 × 70MM	400 × 150 × 70MM	500 × 210 × 70MM
太阳能板功率 Solar panel power	20W	30W	50W
工作时长 Working Time	12Hrs	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65




宝剑摄像路灯(太阳能)
Sword photography street lamp (solar energy)
TYN-S-10

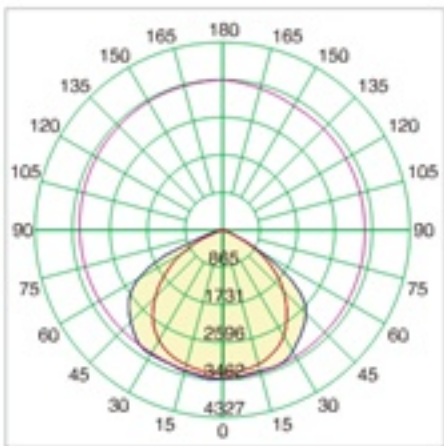

型号 Model No.	TYN-S-10		
额定功率 Rate Power	20W	30W	50W
适用高度 Height	4~6M	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	16000MAH	21000MAH	26000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	350 × 150 × 70MM	400 × 150 × 70MM	500 × 210 × 70MM
太阳能板功率 Solar panel power	20W	30W	50W
工作时长 Working Time	12Hrs	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65



太阳能牙刷路灯智能化
Solar toothbrush, street lamp, intelligent
TYN-09

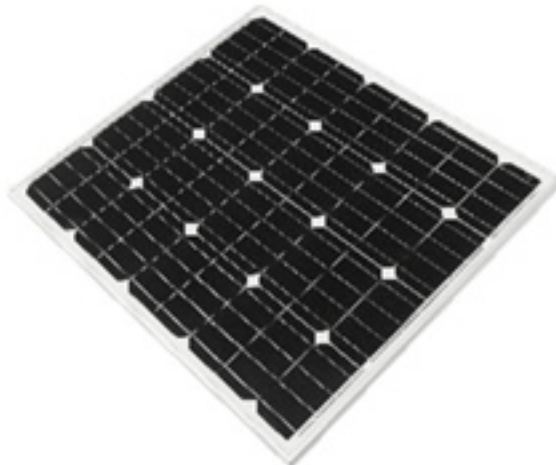


节能
Energy saving



高亮度
High brightness




长寿命
Long life

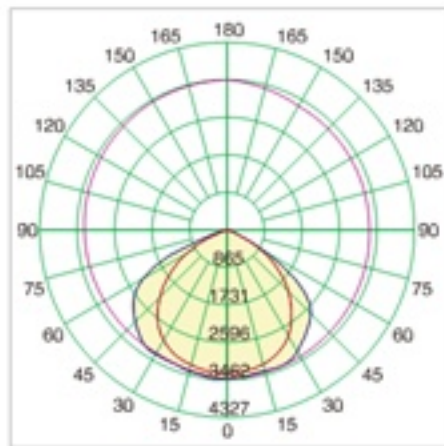

型号 Model No.	TYN-09			
额定功率 Rate Power	20W	30W	40W	50W
适用高度 Height	4~6M	4~6M	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	5300MAH	11000MAH	16000MAH	21000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	400 × 140 × 70MM	470 × 200 × 70MM	470 × 200 × 70MM	610 × 280 × 75MM
太阳能板功率 Solar panel power	20W	30W	40W	50W
工作时长 Working Time	12Hrs	12Hrs	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65	IP65



太阳能牙刷感应路灯
Solar toothbrush street lamp
TYN-GY-09

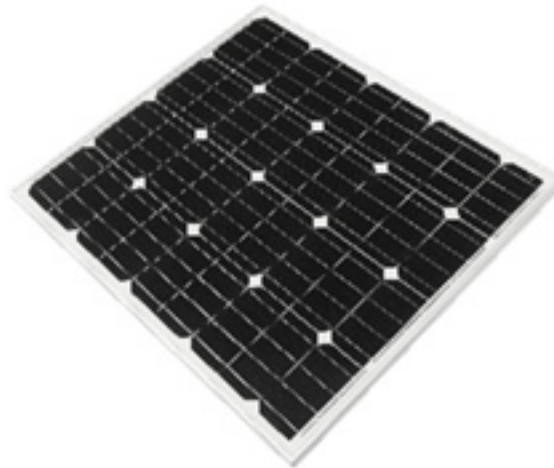


节能
Energy saving



高亮度
High brightness



长寿命
Long life

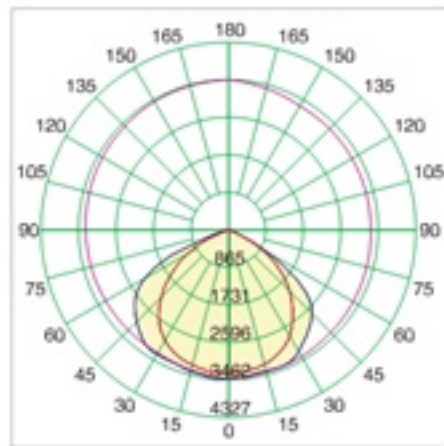

型号 Model No.	TYN-GY-09			
额定功率 Rate Power	20W	30W	40W	50W
适用高度 Height	4~6M	4~6M	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	5300MAH	11000MAH	16000MAH	21000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	400 × 140 × 70MM	470 × 200 × 70MM	470 × 200 × 70MM	610 × 280 × 75MM
太阳能板功率 Solar panel power	20W	30W	40W	50W
工作时长 Working Time	12Hrs	12Hrs	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65	IP65



一体化太阳能感应路灯系列
Integrated solar Induction street lamp series
TYN-11




节能
Energy saving



高亮度
High brightness



长寿命
Long life

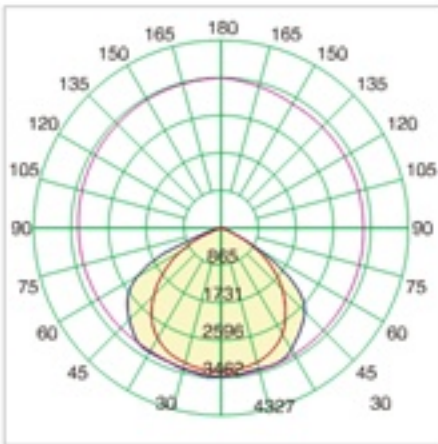

型号 Model No.	TYN-11	
额定功率 Rate Power	20W	40W
适用高度 Height	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V
锂电池功率 Battery	11000MAH	21000MAH
色温 CCT	2600K-6500K	2600K-6500K
尺寸 Size	500*250*70MM	625*250*90MM
太阳能板功率 Solar panel power	20W	40W
工作时长 Working Time	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65



一体化太阳能感应摄像系列
Integrated solar Induction camera series
TYN-S-11



感应+200万像素摄像头
内置5db天线内存卡,稳定不掉线
只要链接WIFI,手机实时监控




节能
Energy saving



高亮度
High brightness



长寿命
Long life

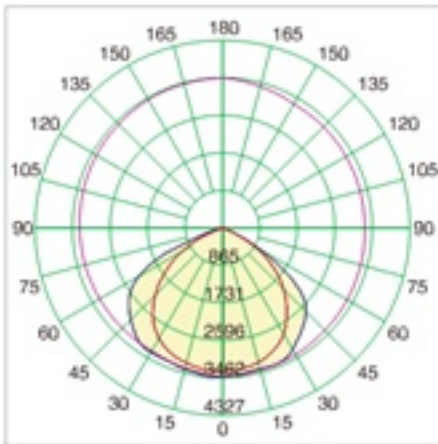

型号 Model No.	TYN-S-11	
额定功率 Rate Power	20W	40W
适用高度 Height	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V
锂电池功率 Battery	16000MAH	26000MAH
光通量 Luminous Flux	2600K-6500K	2600K-6500K
尺寸 Size	500*250*70MM	625*250*90MM
太阳能板功率 Solar panel power	20W	40W
工作时长 Working Time	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65



2037太阳能感应投光灯
2037 solar Induction light
TYN-GY-01




节能
Energy saving



高亮度
High brightness




长寿命
Long life

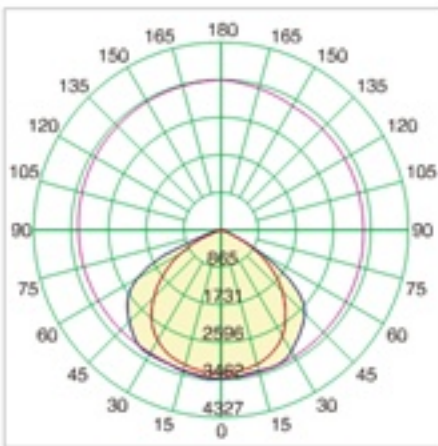

型号 Model No.	TYN-GY-01			
额定功率 Rate Power	10W	20W	30W	50W
适用高度 Height	4~6M	4~6M	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	3000MAH	4200MAH	5200MAH	11000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	185 × 150 × 190MM	215 × 210 × 260MM	465x440x390MM	415x375x600MM
太阳能板功率 Solar panel power	10W	20W	30W	50W
工作时长 Working Time	12Hrs	12Hrs	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65	IP65



5054太阳能感应投光灯
5054 solar Induction light
TYN-GY-02

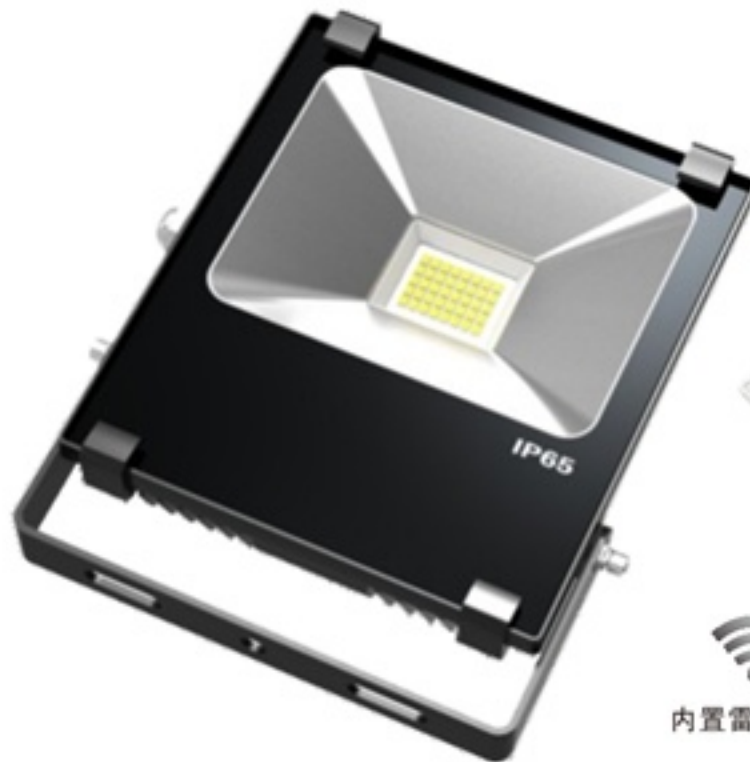

内置雷达感应




节能
Energy saving



高亮度
High brightness



长寿命
Long life

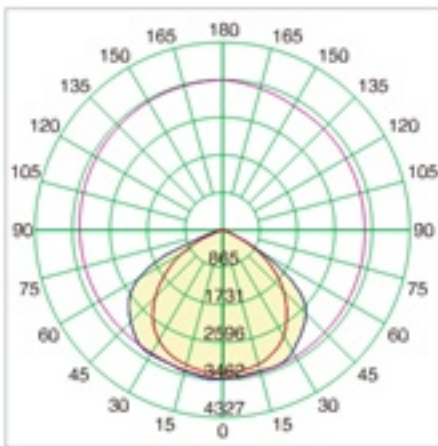

型号 Model No.	TYN-GY-02			
额定功率 Rate Power	10W	20W	30W	50W
适用高度 Height	4~6M	4~6M	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	3000MAH	4200MAH	5200MAH	11000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	170 × 120 × 60MM	225 × 165 × 60MM	232 × 180 × 65MM	300 × 215 × 75MM
太阳能板功率 Solar panel power	10W	20W	30W	50W
工作时长 Working Time	12Hrs	12Hrs	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65	IP65



2037太阳能遥控投光灯
2037 solar remote control light
TYN-LD01




节能
Energy saving



高亮度
High brightness




长寿命
Long life

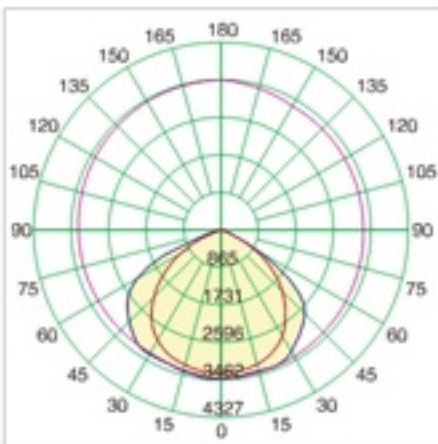

型号 Model No.	TYN-LD01			
额定功率 Rate Power	10W	20W	30W	50W
适用高度 Height	4~6M	4~6M	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	3000MAH	4200MAH	5200MAH	11000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	185 × 150 × 190MM	215 × 210 × 260MM	465x440x390MM	415x375x600MM
太阳能板功率 Solar panel power	10W	20W	30W	50W
工作时长 Working Time	12Hrs	12Hrs	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65	IP65



5054太阳能遥控投光灯
5054 solar remote control light
TYN-YK-02

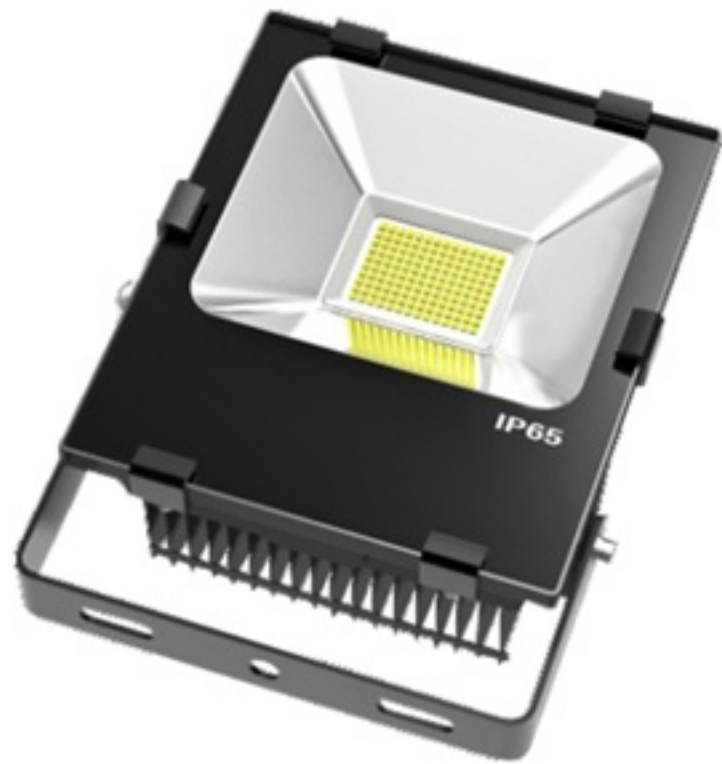


节能
Energy saving



高亮度
High brightness




长寿命
Long life

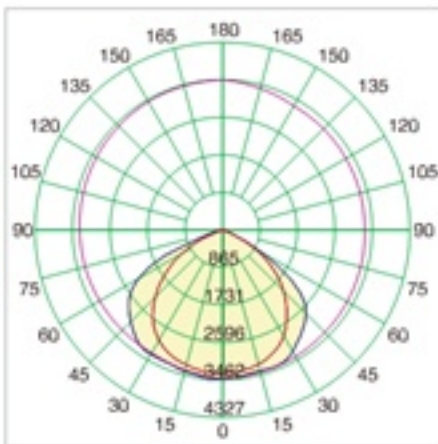

型号 Model No.	TYN-YK-02			
额定功率 Rate Power	10W	20W	30W	50W
适用高度 Height	4~6M	4~6M	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	3000MAH	4200MAH	5200MAH	11000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	170 × 120 × 60MM	225 × 165 × 60MM	232 × 180 × 65MM	300 × 215 × 75MM
太阳能板功率 Solar panel power	10W	20W	30W	50W
工作时长 Working Time	12Hrs	12Hrs	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65	IP65



太阳能充电式投光灯
Solar energy charging type light projector
TYN-001CD

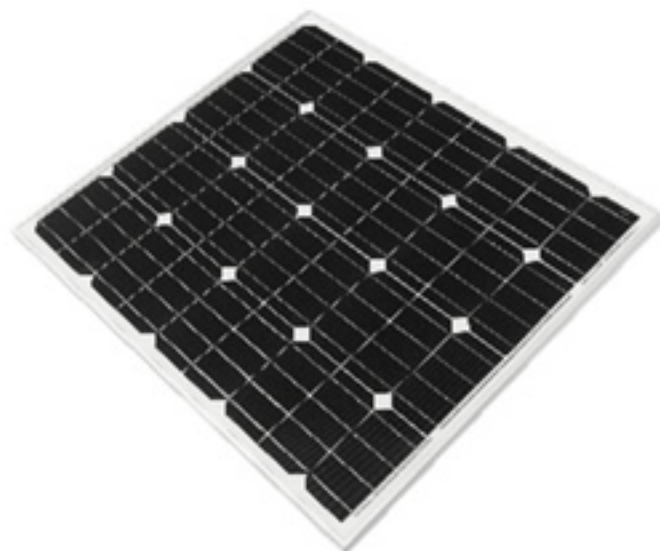


节能
Energy saving



高亮度
High brightness



长寿命
Long life

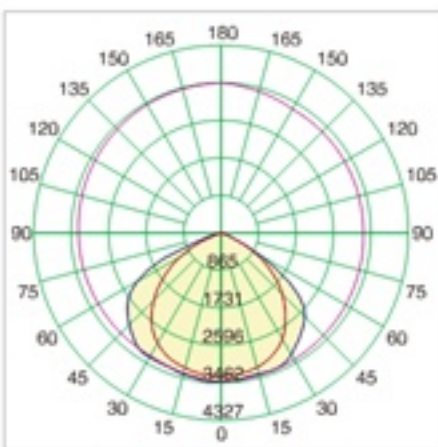

型号 Model No.	TYN-001CD			
额定功率 Rate Power	10W	20W	30W	50W
适用高度 Height	\	\	\	\
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	3000MAH	4200MAH	5200MAH	11000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	195 × 190 × 150MM	245 × 220 × 205MM	300 × 250 × 190MM	310 × 175 × 325MM
太阳能板功率 Solar panel power	10W	20W	30W	50W
工作时长 Working Time	4-6Hrs	4-6Hrs	4-6Hrs	4-6Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65	IP65	IP65



充电式投光灯系列
Rechargeable light projector series
2037-001CD




节能
Energy saving



高亮度
High brightness



长寿命
Long life

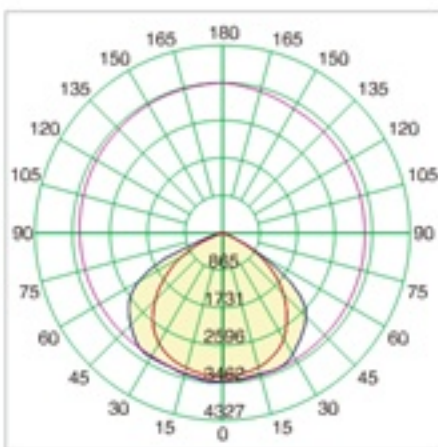

型号 Model No.	2037-001CD			
额定功率 Rate Power	10W	20W	30W	50W
适用高度 Height	\	\	\	\
额定电压 System Voltage	DC7V-12V	DC7V-12V	DC7V-12V	DC7V-12V
锂电池功率 Battery	3000MAH	4200MAH	5200MAH	11000MAH
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
尺寸 Size	195 × 190 × 150MM	245 × 220 × 205MM	300 × 250 × 190MM	310 × 175 × 325MM
太阳能板功率 Solar panel power	\	\	\	\
工作时长 Working Time	4-6Hrs	4-6Hrs	4-6Hrs	4-6Hrs
阴雨天数 Rainy Days	\	\	\	\
防护等级 IP Rate	IP65	IP65	IP65	IP65



太阳能地埋灯系列
Solar buried lamp series
TYN-13




节能
Energy saving



高亮度
High brightness



长寿命
Long life

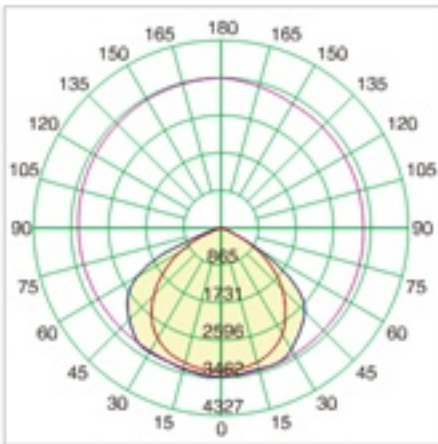

型号 Model No.	TYN-13	
额定功率 Rate Power	3W	5W
适用高度 Height	\	\
额定电压 System Voltage	DC3V-5V	DC3V-5V
锂电池功率 Battery	1600MAH	2600MAH
色温 CCT	2600K-6500K	2600K-6500K
尺寸 Size	150 × 60MM	250 × 60MM
太阳能板功率 Solar panel power	3W	5W
工作时长 Working Time	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65



太阳能感应壁灯
Solar Induction wall lamp
TYN-15



人体感应




节能
Energy saving



高亮度
High brightness



长寿命
Long life

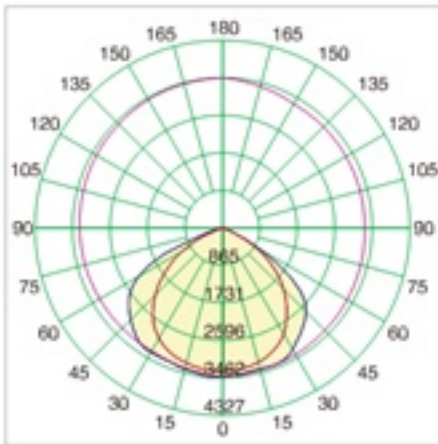

型号 Model No.	TYN-15	
额定功率 Rate Power	5W	10W
适用高度 Height	4~6M	4~6M
额定电压 System Voltage	DC7V-12V	DC7V-12V
锂电池功率 Battery	4000MAH	8000MAH
色温 CCT	2600K-6500K	2600K-6500K
尺寸 Size	49 × 44 × 29MM	49 × 44 × 29MM
太阳能板功率 Solar panel power	5W	10W
工作时长 Working Time	12Hrs	12Hrs
阴雨天数 Rainy Days	3~5DAY	3~5DAY
防护等级 IP Rate	IP65	IP65



宝剑常规路灯系列
Sword routine street lamp series
LD-06




节能
Energy saving



高亮度
High brightness



长寿命
Long life

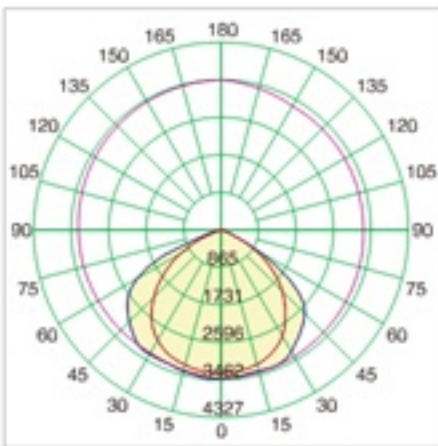

型号 Model No.	LD-06				
额定功率 Rate Power	30W	50W	100W	150W	200W
适用高度 Height	9M	9M	9M	12M	12M
输入电压 Input Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
光通量 Luminous Flux	3000LM	5000LM	10000LM	15000LM	20000LM
尺寸 Size	400 × 150 × 70MM	500 × 210 × 70MM	720 × 285 × 110MM	880 × 335 × 110MM	1100 × 355 × 120MM
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
功率因数 CRI	>0.95	>0.95	>0.95	>0.95	>0.95
工作寿命 Working Time	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs
环境温度 Ambient temperature	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°
防护等级 IP Rate	IP65	IP65	IP65	IP65	IP65



常规牙刷路灯
Conventional toothbrush street lamp
LD-09




节能
Energy saving



高亮度
High brightness




长寿命
Long life

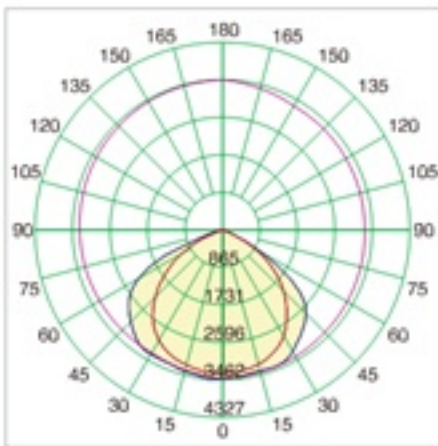

型号 Model No.	LD-09						
额定功率 Rate Power	12W	24W	30W	50W	60W	80W	100W
适用高度 Height	6M	6M	6M	6M	9M	9M	9M
输入电压 Input Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
光通量 Luminous Flux	1200LM	2400LM	3000LM	5000LM	6000LM	8000LM	10000LM
尺寸 Size	350 × 95 × 65MM	400 × 140 × 70MM	470 × 200 × 70MM	470 × 200 × 70MM	610 × 280 × 75MM	610 × 280 × 75MM	700 × 390 × 80MM
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
功率因数 CRI	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
工作寿命 Working Time	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs
环境温度 Ambient temperature	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°
防护等级 IP Rate	IP65	IP65	IP65	IP65	IP65	IP65	IP65




常规模组路灯系列
Conventional modular streetlight series
LD-12

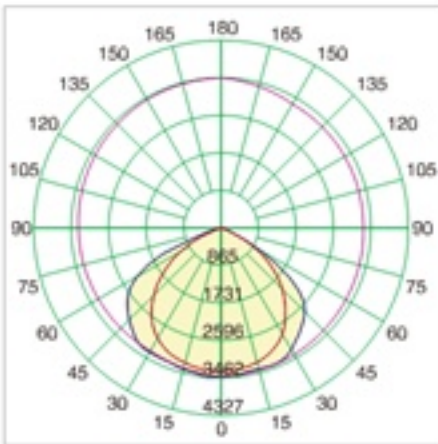

型号 Model No.	LD-12					
额定功率 Rate Power	60W	90W	120W	150W	180W	210W
适用高度 Height	9M	9M	9~12M	9~12M	9~12M	9~12M
输入电压 Input Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
光通量 Luminous Flux	6000LM	9000LM	12000LM	15000LM	18000LM	21000LM
尺寸 Size	435 × 395 × 195MM	525 × 395 × 195MM	620 × 395 × 195MM	710 × 395 × 195MM	805 × 395 × 195MM	895 × 395 × 195MM
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
功率因数 CRI	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
工作寿命 Working Time	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs
环境温度 Ambient temperature	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°
防护等级 IP Rate	IP65	IP65	IP65	IP65	IP65	IP65



常规工矿灯
Conventional miner's lamp
GK-02

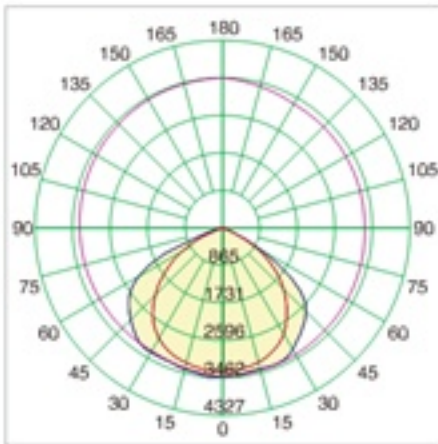

型号 Model No.	GK-02			
额定功率 Rate Power	50W	100W	150W	200W
适用高度 Height	\	\	\	\
输入电压 Input Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
光通量 Luminous Flux	5000LM	10000LM	15000LM	20000LM
尺寸 Size	260 × 260 × 280MM	260 × 260 × 330MM	310 × 260 × 420MM	310 × 260 × 420MM
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
功率因数 CRI	>0.95	>0.95	>0.95	>0.95
工作寿命 Working Time	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs
环境温度 Ambient temperature	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°
防护等级 IP Rate	IP60	IP60	IP60	IP60



飞碟工矿灯系列
UFO mining lamp series
L6021




节能
Energy saving



高亮度
High brightness



长寿命
Long life

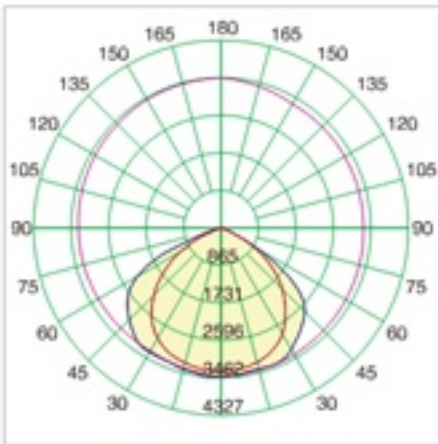

型号 Model No.	L6021		
额定功率 Rate Power	100W	150W	200W
适用高度 Height	3~6M	3~6M	3~6M
输入电压 Input Voltage	AC85V-265V	AC85V-265V	AC85V-265V
光通量 Luminous Flux	10000LM	15000LM	20000LM
尺寸 Size	380*380*175MM	433*433*185MM	478*478*210MM
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K
功率因数 CRI	>0.95	>0.95	>0.95
工作寿命 Working Time	>30000Hrs	>30000Hrs	>30000Hrs
环境温度 Ambient temperature	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°
防护等级 IP Rate	IP65	IP65	IP65



线性工矿灯
Linear miner's lamp
GK-X1




节能
Energy saving



高亮度
High brightness




长寿命
Long life

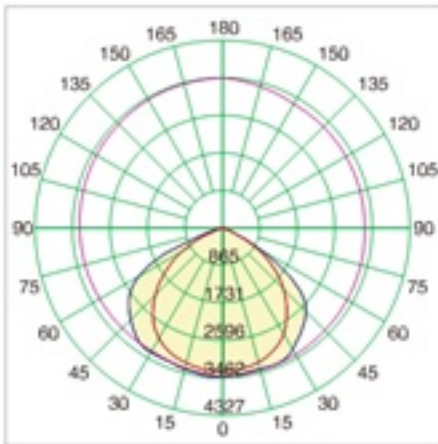

型号 Model No.	GK-X1		
额定功率 Rate Power	100W	150W	200W
适用高度 Height	\	\	\
输入电压 Input Voltage	AC180V-240V	AC180V-240V	AC180V-240V
光通量 Luminous Flux	10000LM	15000LM	20000LM
尺寸 Size	MM	MM	MM
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K
功率因数 CRI	>0.95	>0.95	>0.95
工作寿命 Working Time	>30000Hrs	>30000Hrs	>30000Hrs
环境温度 Ambient temperature	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°
防护等级 IP Rate	IP60	IP60	IP60





常规投光灯系列
General floodlight series
2037-009

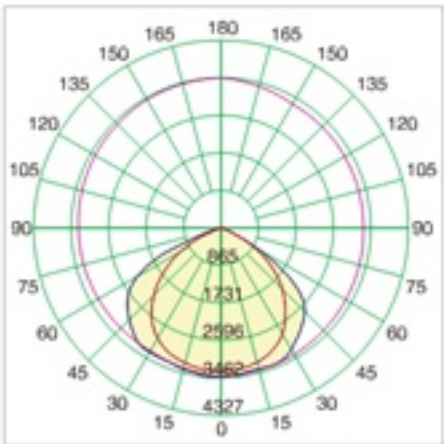

型号 Model No.	2037-009			
额定功率 Rate Power	50W	70W	100W	200W
适用高度 Height	\	\	\	\
输入电压 Input Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
光通量 Luminous Flux	5000LM	7000LM	10000LM	20000LM
尺寸 Size	310 × 250 × 95MM	310 × 250 × 95MM	385 × 325 × 115MM	470 × 410 × 140MM
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
功率因数 CRI	>0.95	>0.95	>0.95	>0.95
工作寿命 Working Time	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs
环境温度 Ambient temperature	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°
防护等级 IP Rate	IP65	IP65	IP65	IP65



5054常规投光灯系列
5054General floodlight series
L5054

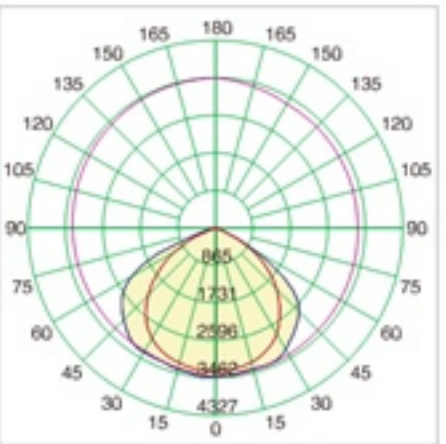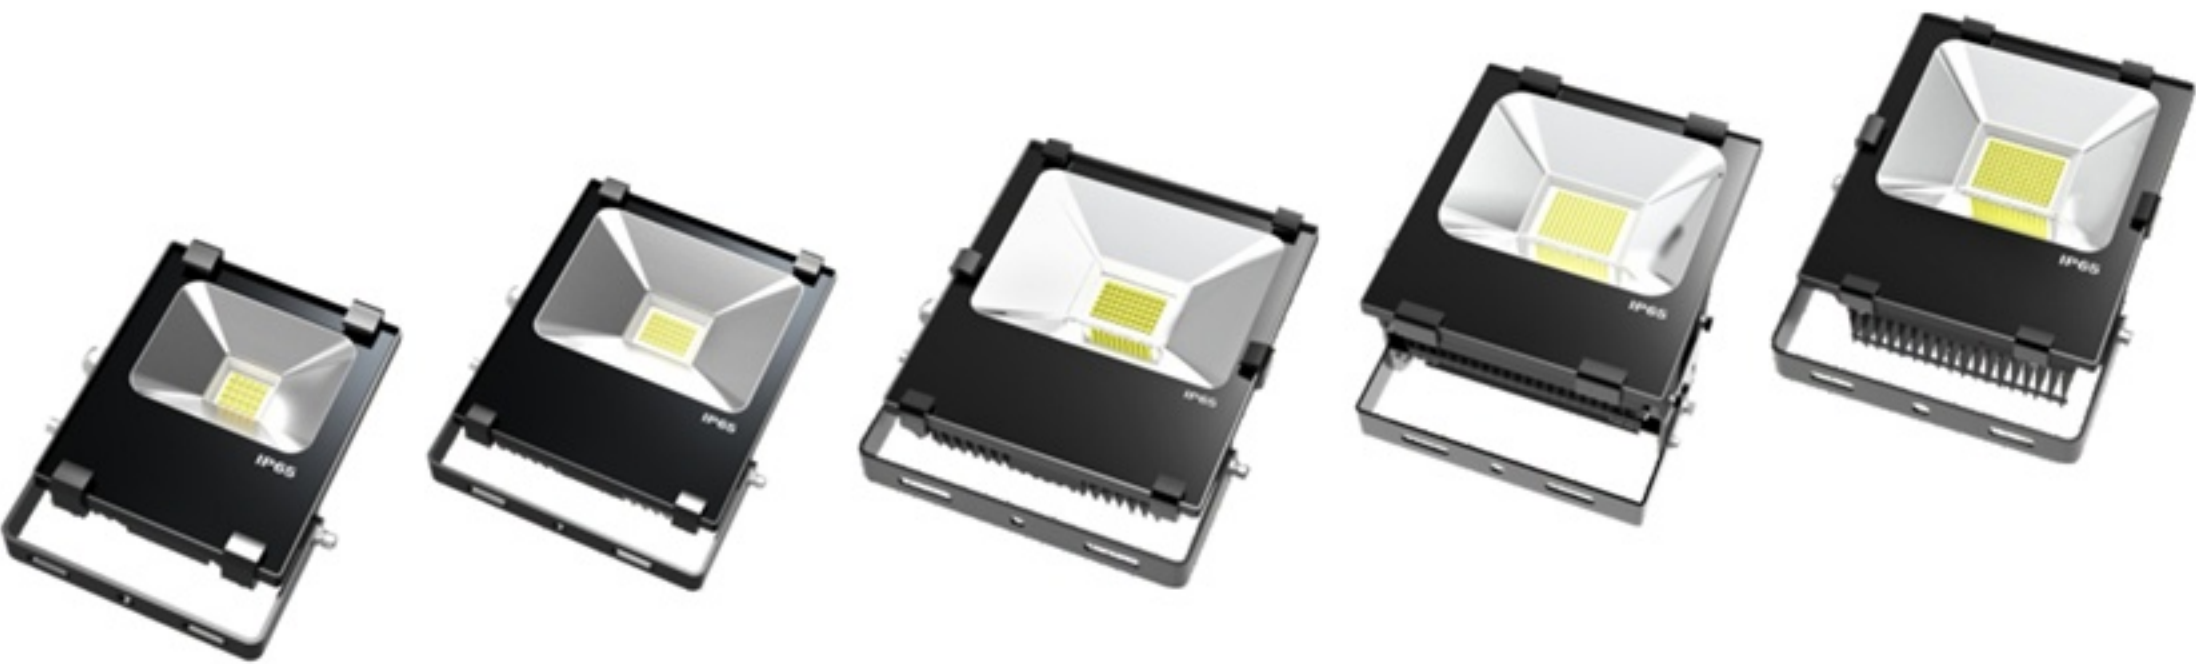

型号 Model No.	L5054					
额定功率 Rate Power	10W	20W	30W	50W	70W	100W
适用高度 Height	\	\	\	\	\	\
输入电压 Input Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
光通量 Luminous Flux	1000LM	2000LM	3000LM	5000LM	7000LM	10000LM
尺寸 Size	170 × 120 × 60MM	225 × 165 × 60MM	232 × 180 × 65MM	300 × 215 × 75MM	355 × 267 × 75MM	355 × 267 × 75MM
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
功率因数 CRI	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
工作寿命 Working Time	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs
环境温度 Ambient temperature	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°
防护等级 IP Rate	IP65	IP65	IP65	IP65	IP65	IP65



8018常规投光灯系列
8018General floodlight series
L8018-SMD




节能
Energy saving



高亮度
High brightness



长寿命
Long life

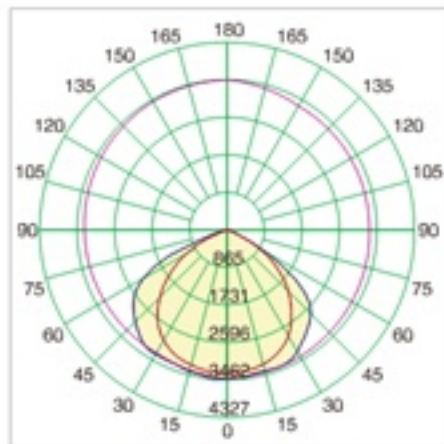

型号 Model No.	L8018-SMD					
额定功率 Rate Power	10W	20W	30W	50W	70W	100W
适用高度 Height	\	\	\	\	\	\
输入电压 Input Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
光通量 Luminous Flux	1000LM	2000LM	3000LM	5000LM	7000LM	10000LM
尺寸 Size	118 × 145 × 43MM	183 × 205 × 45MM	228 × 240 × 52MM	283 × 305 × 65MM	287 × 340 × 65MM	287 × 340 × 65MM
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
功率因数 CRI	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
工作寿命 Working Time	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs
环境温度 Ambient temperature	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°
防护等级 IP Rate	IP65	IP65	IP65	IP65	IP65	IP65



8019常规投光灯系列
8019General floodlight series
L8019




节能
Energy saving



高亮度
High brightness



长寿命
Long life

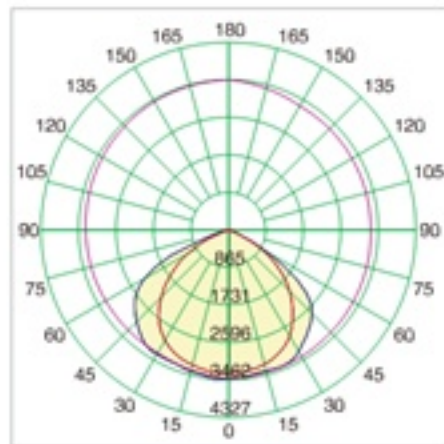

型号 Model No.	L8019					
额定功率 Rate Power	10W	20W	30W	50W	70W	100W
适用高度 Height	\	\	\	\	\	\
输入电压 Input Voltage	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V	AC85V-265V
光通量 Luminous Flux	1000LM	2000LM	3000LM	5000LM	7000LM	10000LM
尺寸 Size	112 × 84 × 45MM	138 × 179 × 48MM	184 × 223 × 52MM	283 × 231 × 67MM	287 × 340 × 70MM	287 × 340 × 70MM
色温 CCT	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K	2600K-6500K
功率因数 CRI	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
工作寿命 Working Time	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs	>30000Hrs
环境温度 Ambient temperature	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°	-20° ~ 40°
防护等级 IP Rate	IP65	IP65	IP65	IP65	IP65	IP65